


AG DIM.				
	2 POLE	4 POLE	6 POLE	8 POLE
1/2 HP	9.08	9.08		
1 HP	10.58	10.58		
1.5 HP	11.08	11.08		
2 HP	11.58	11.58		
3 HP	11.58			

REVISIONS			
REV	DESCRIPTION	BY	DATE

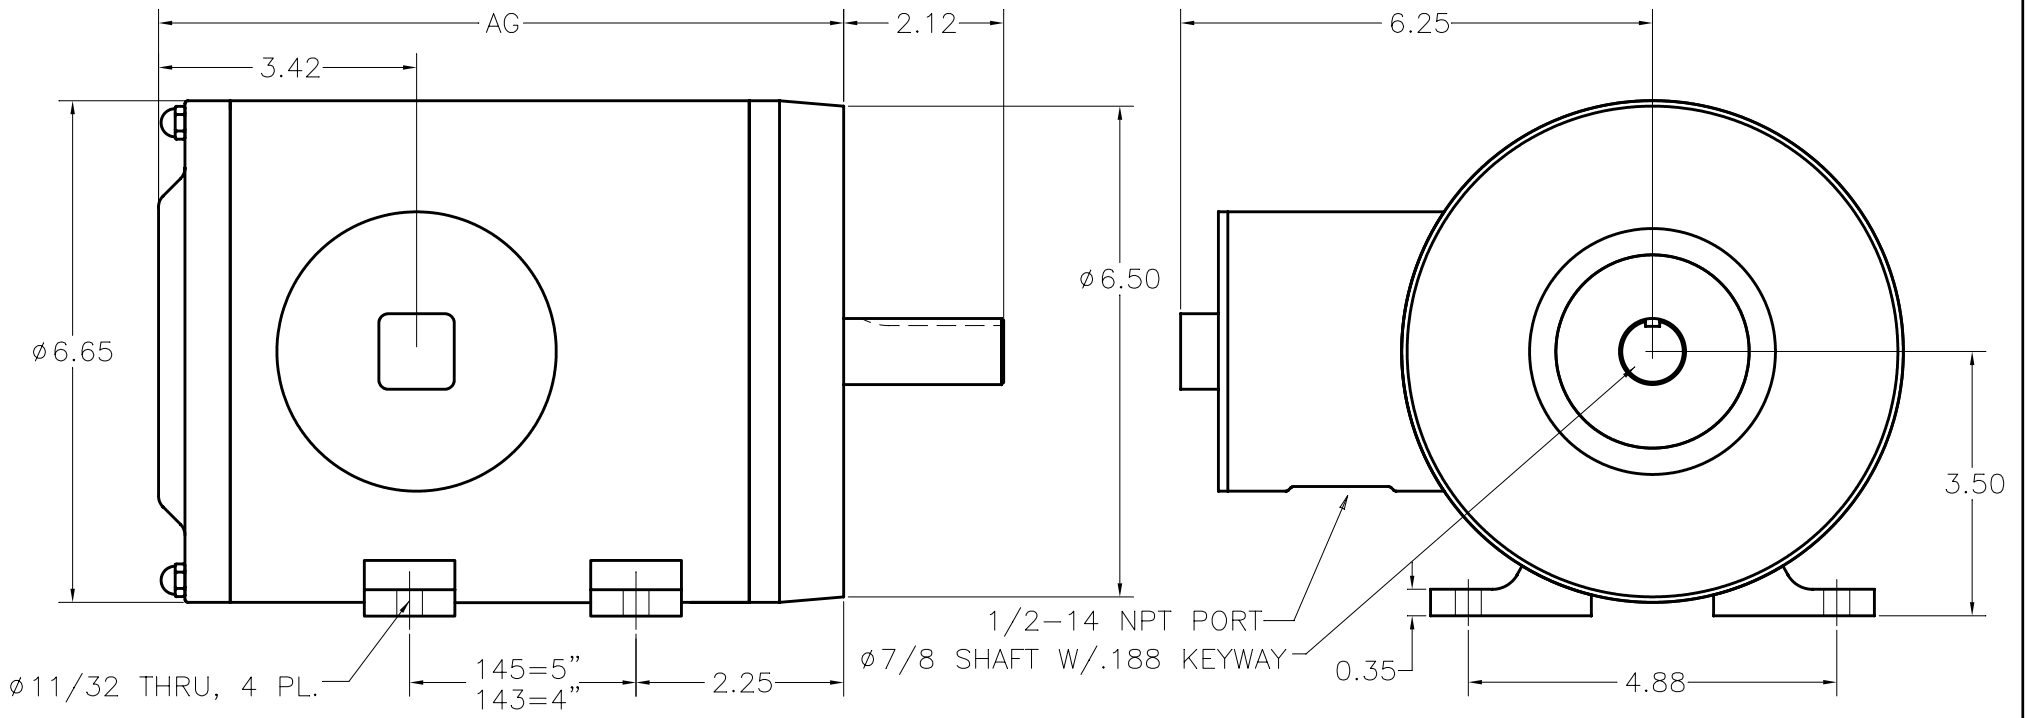

Ø 11/32 THRU, 4 PL.

1/2-14 NPT PORT
 Ø 7/8 SHAFT W/.188 KEYWAY

NOTES:

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS AND SURFACE TEXTURE DESIGNATIONS APPLY PRIOR TO FINISH DEBURR AND BREAK ALL SHARP EDGES .005-.015	MATERIAL: T304 EXTERIOR 17-4 H1150 SHAFT	STAINLESS MOTORS INC.	
	FINISH: #2B AS CAST FEET		DRAWN MFG CHECK
	GENERAL TOLERANCES: .X = ±.015 .XX = ±.010 .XXX = ±.005	FRACTIONAL = ±1/64 ANGULAR = ±1/2°	143T/145T FRAME FOOT MOUNT TENV, THRU FOOT
	REFERENCE DRAWING:	ENG: JO DATE: 07/06/05	
DRWG. NO. F:\DRAFTING\MOTORS\STANDARDIZED DRAWINGS\FOOD\140\140T-TENV			