


AG DIM.

	2 POLE	4 POLE	6 POLE	8 POLE
1/2 HP	10.31	10.31		
1 HP	11.81	11.81		
1.5 HP	12.31	12.31		
2 HP	12.31	12.81		
3 HP	12.81			

REVISIONS

REV	DESCRIPTION	BY	DATE

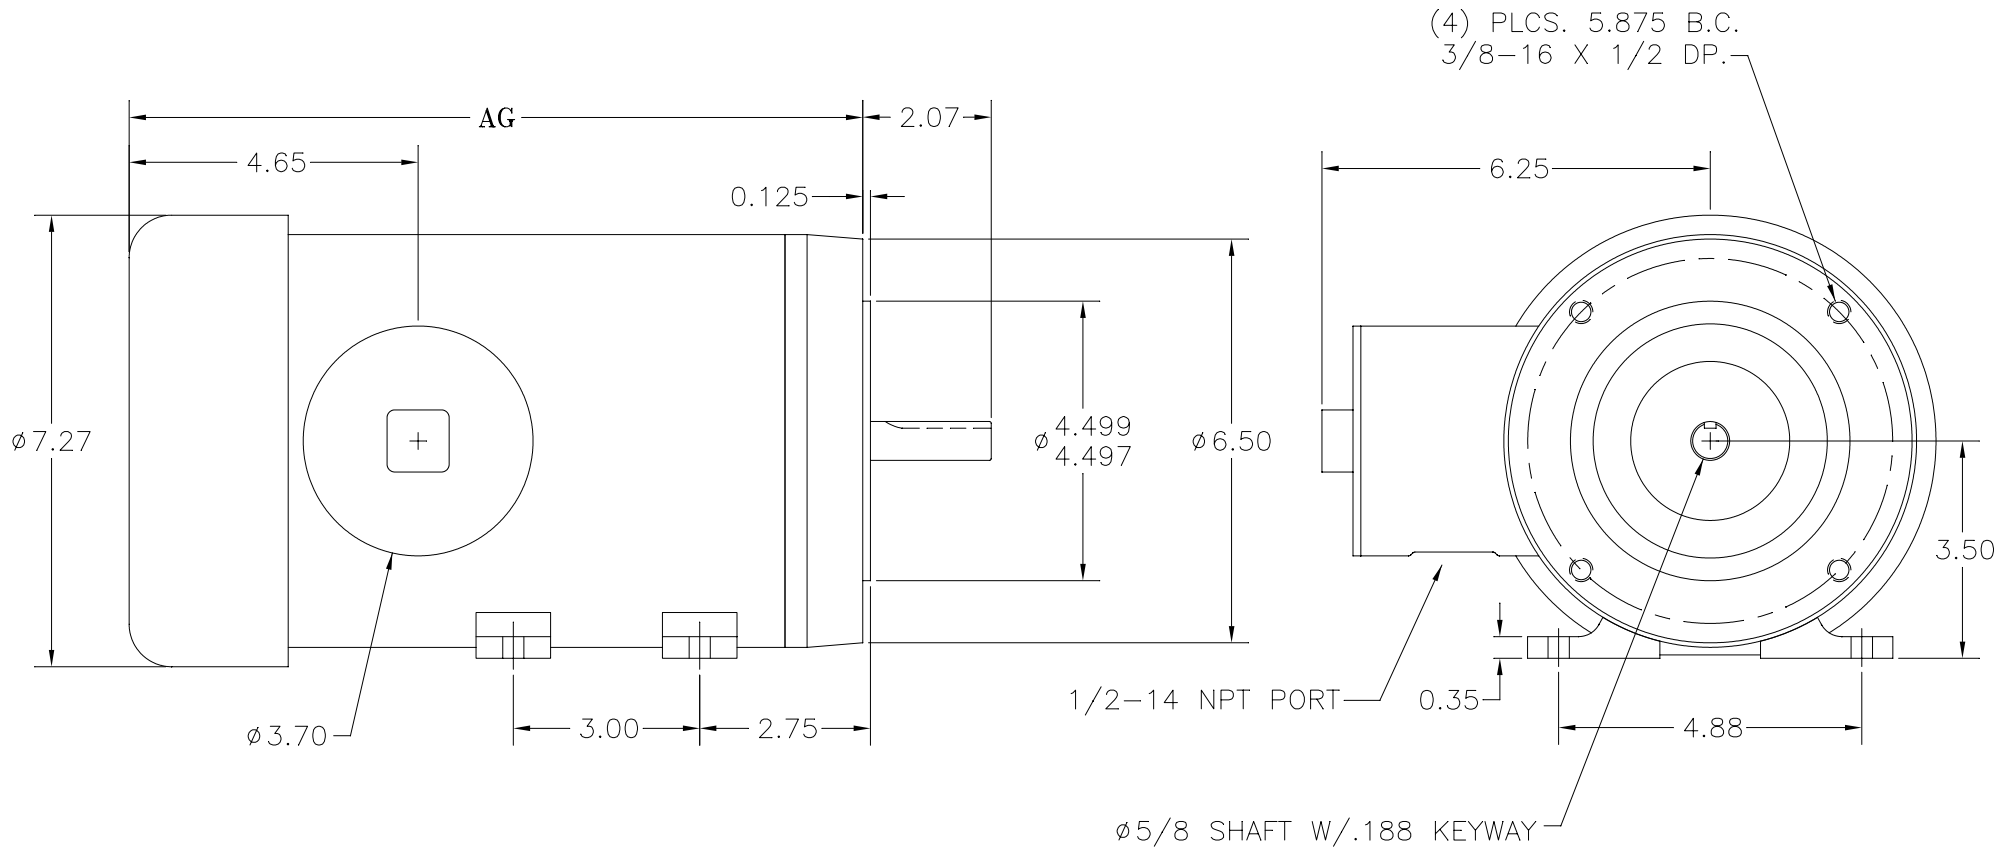

- 2. ALLOW 1" CLEARANCE BEYOND FAN SHROUD FOR AIR FLOW
- 1. FOOTLESS DIMS SAME

NOTES:

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DIMENSIONS AND SURFACE TEXTURE DESIGNATIONS APPLY PRIOR TO FINISH DEBURR AND BREAK ALL SHARP EDGES .005-.015	MATERIAL: T304 EXTERIOR 17-4 H1150 SHAFT	<b>STAINLESS MOTORS INC.</b>
	FINISH: #2B AS CAST FEET	
GENERAL TOLERANCES: .X = ±.015 .XX = ±.010 .XXX = ±.005	FRACTIONAL = ±1/64 ANGULAR = ±1/2°	DRAWN GP CHECK ENG. JO DATE 4/21/03
REFERENCE DRAWING:	DRWG. NO. DRAFTING\MOTORS\STANDARDIZED DRAWINGS\F00D\56\56C	56C FRAME C FACE MOUNT TEFC, THRU FOOT