AG DIM.				
	2 POLE	4 POLE	6 POLE	8 POLE
1 HP				14.86
1.5 HP				14.86
2 HP		12.86	14.86	
3 HP	12.86	12.86		
5 HP	14.86	14.86		

REVISIONS			
REV	DESCRIPTION	BY	DATE

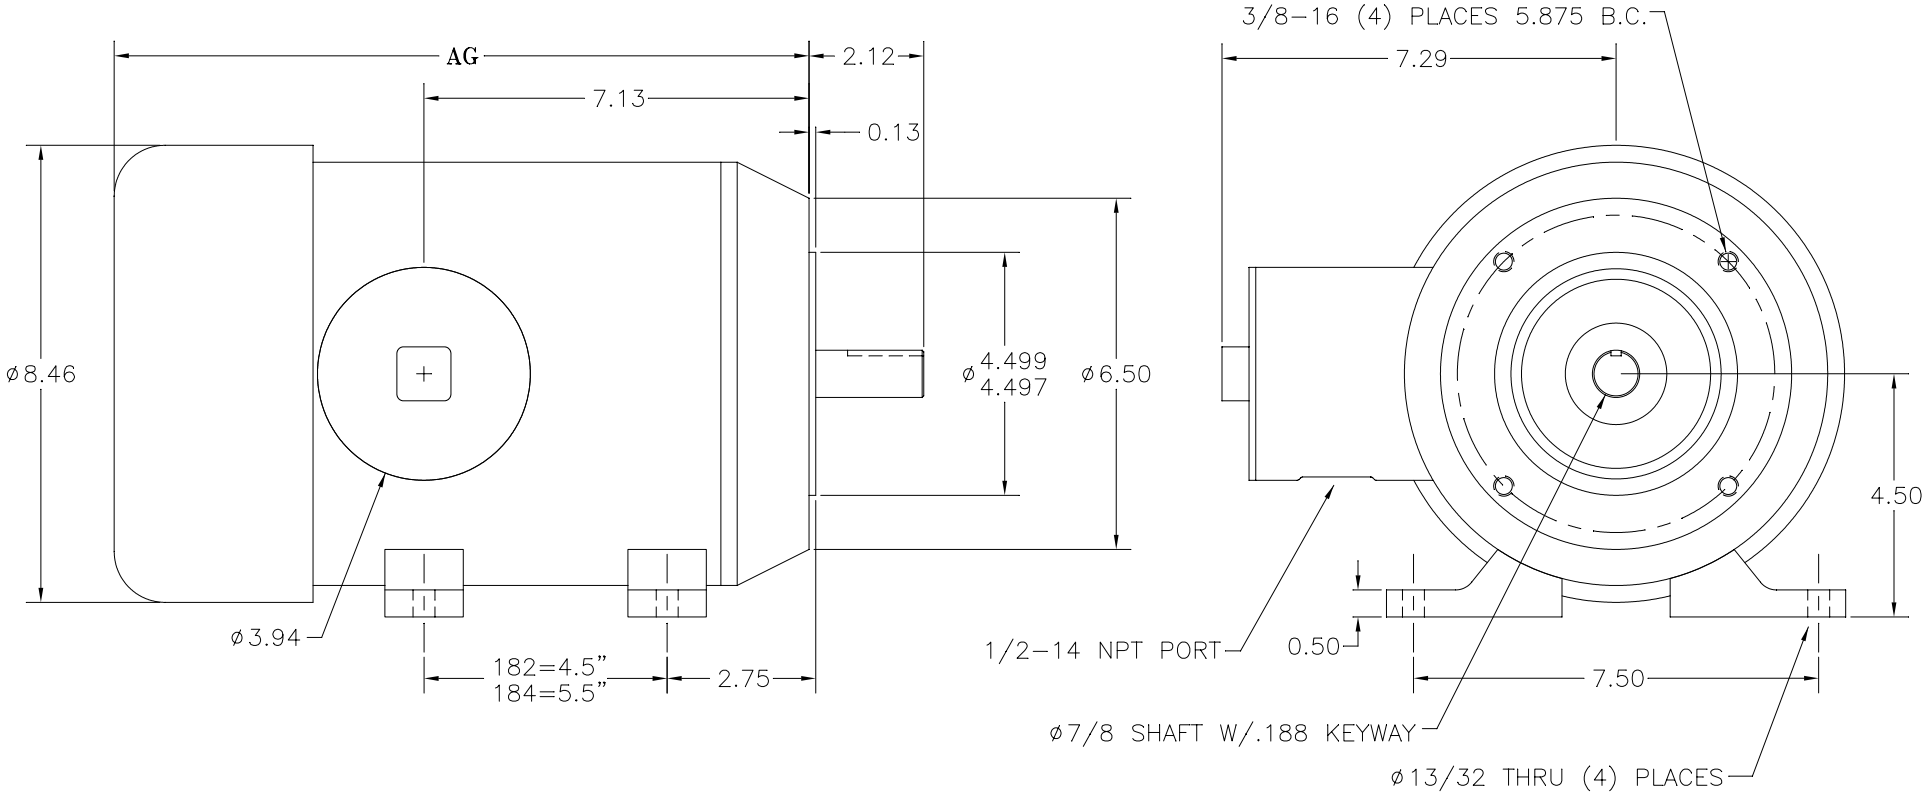

3. ALLOW 1" CLEARANCE BEYOND FAN SHROUD FOR AIR FLOW.
2. FOOTLESS DIMS SAME
1. THROUGH HOLE FOOT SHOWN, BLIND TAPPED FOOT AVAILABLE WITH 3/8–16 X .450 DP.

NOTES:

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

DIMENSIONS AND SURFACE TEXTURE DESIGNATIONS APPLY PRIOR TO FINISH

DEBURR AND BREAK ALL SHARP EDGES .005–.015

MATERIAL: T304 EXTERIOR
17–4 H1150 SHAFT

FINISH: #4 LINE
POLISHED SHROUD

GENERAL TOLERANCES:
.X = ±.015
.XX = ±.010
.XXX = ±.005
FRACTIONAL = ±1/64
ANGULAR = ±1/2°

REFERENCE DRAWING:

DRWG. NO. DRAFTING\MOTORS\STANDARDIZED DRAWINGS\PHARM\180\180C

STAINLESS MOTORS INC.

DRAWN GP
CHECK
ENG. JO
DATE 4/21/03

180C FRAME
C FACE MOUNT
TEFC, THRU FOOT