AG DIM.	2 POLE	4 POLE	6 POLE
1/4 HP	9.01	9.01	10.01
1/2 HP		10.01	

REVISIONS			
REV	DESCRIPTION	BY	DATE

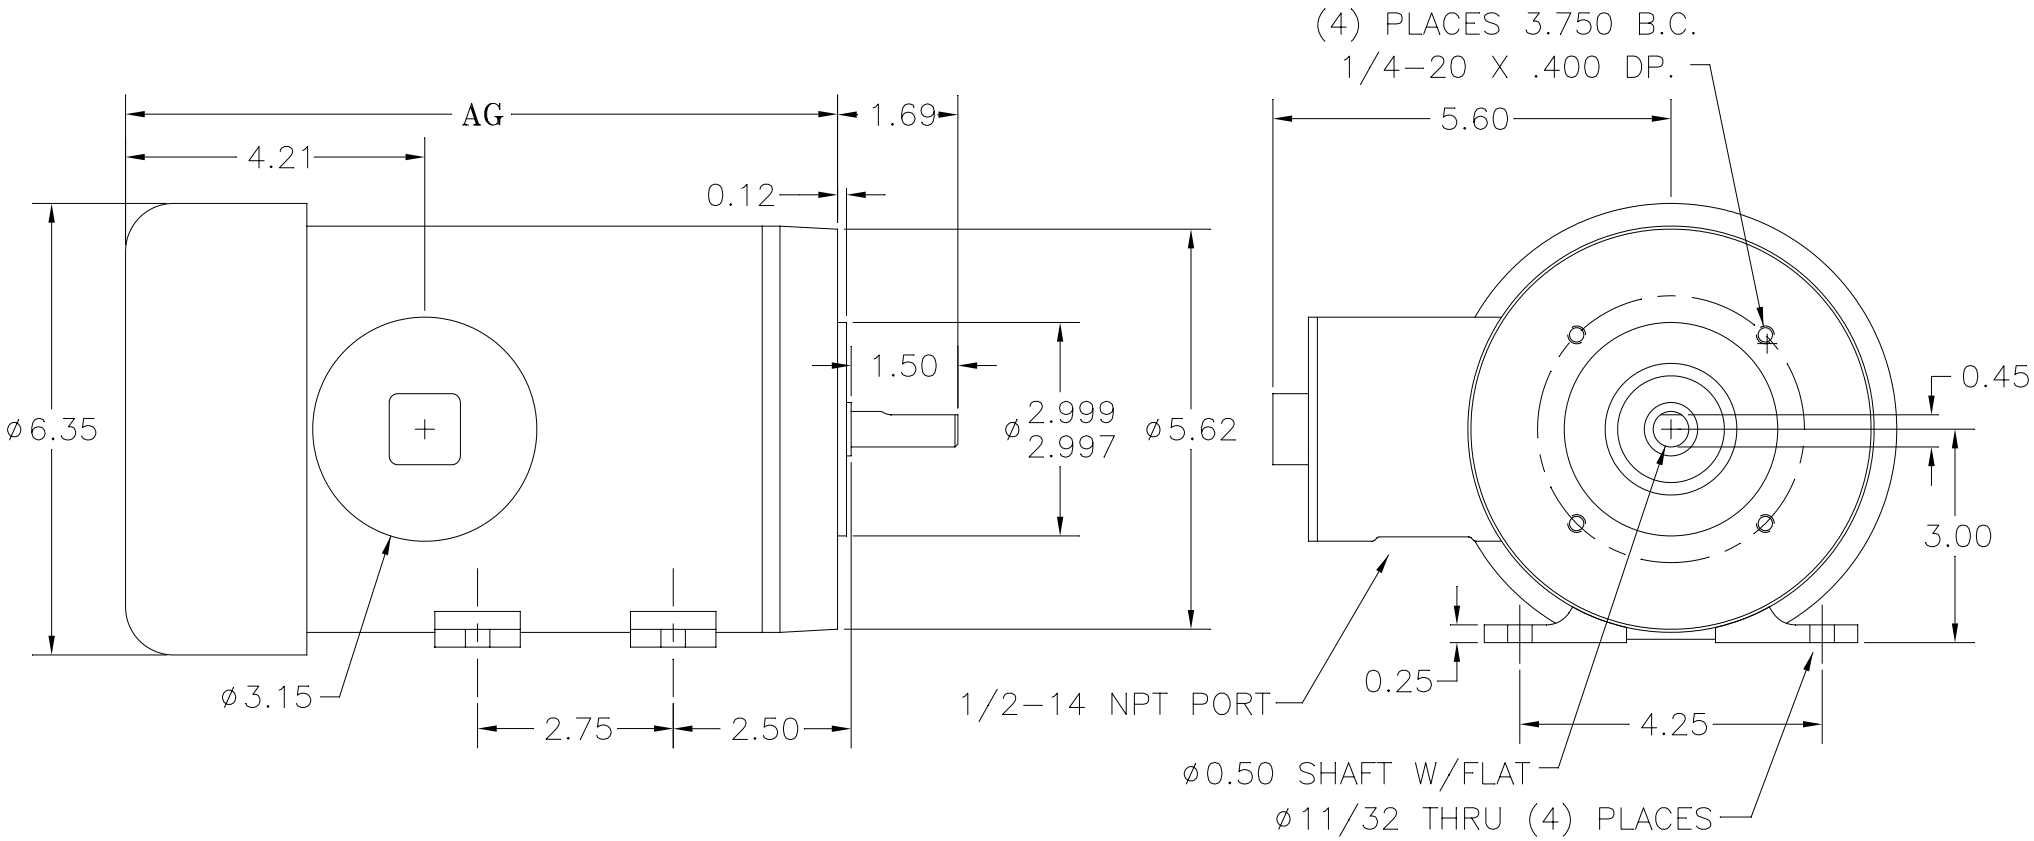

2. ALLOW 1" CLEARANCE BEYOND FAN SHROUD FOR AIR FLOW
1. FOOTLESS DIMS SAME

NOTES:

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

DIMENSIONS AND SURFACE TEXTURE DESIGNATIONS APPLY PRIOR TO FINISH

DEBURR AND BREAK ALL SHARP EDGES .005-.015

MATERIAL: T304 EXTERIOR 17-4 H1150 SHAFT

FINISH: #4 LINE POLISHED SHROUD

GENERAL TOLERANCES:
.X = ±.015
.XX = ±.010
.XXX = ±.005
FRACTIONAL = ±1/64
ANGULAR = ±1/2°

REFERENCE DRAWING:

DRWG. NO. DRAFTING\MOTORS\STANDARDIZED DRAWINGS\PHARM\48\48C

STAINLESS MOTORS INC.

DRAWN GP
CHECK
ENG. JO
DATE 4/21/03

48C FRAME
C FACE MOUNT
TEFC, THRU FOOT